



Part no. 5107000800-xxx

Light source	Linear LP LED modules
Wattage	2x 10 W
Equivalent	2x 14 W FL T5 2x 18 W FL T8
CCT (color)	4,000 K
CRI	≥ 80
Voltage	110-240 V AC
Frequency	50-60 Hz



Surface luminaire for kitchens, pantries, provision stores and coldrooms, IP56

Design	According to rules of maritime classification societies and regulation of USPH
Base plate	Stainless steel
Cover	Clear polycarbonate, impact-proof, UV resistant, with silicone rubber gasket
Mounting	6 mounting holes, \varnothing 5.2 mm
Cable entry	2x M20 PA6 cable glands or grommets
Wiring	flexible wiring, heat resistant up to 105°C
Protection class	IP56
t_a	-30°C ... + 40°C
Weight	3.0 kg

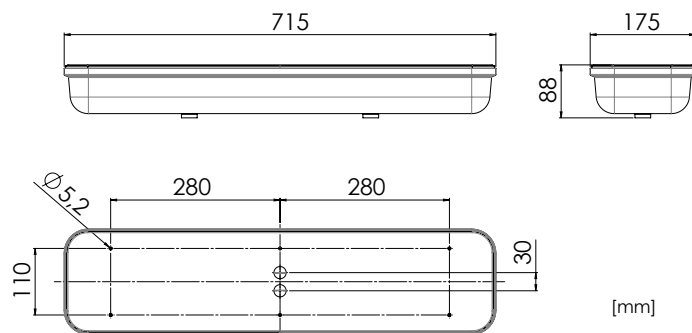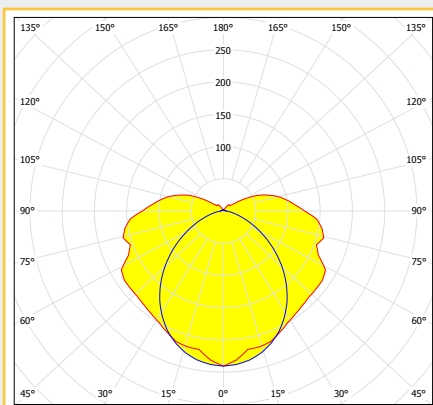

Spare parts

LED module kit	7409001000
LED driver	7103011100
Lamp cover kit	7112015600

Extras

24 V DC

LED mounting tray as refit for KL/KR61 Z fluorescent types

Emergency battery back-up

Different cable glands on request