




... with halfmoon

... with grid

Decorative wall light for open decks

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes, \varnothing 8.7 mm
Cable entry	2 grommets, IP67
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP67
Weight	1.4 kg

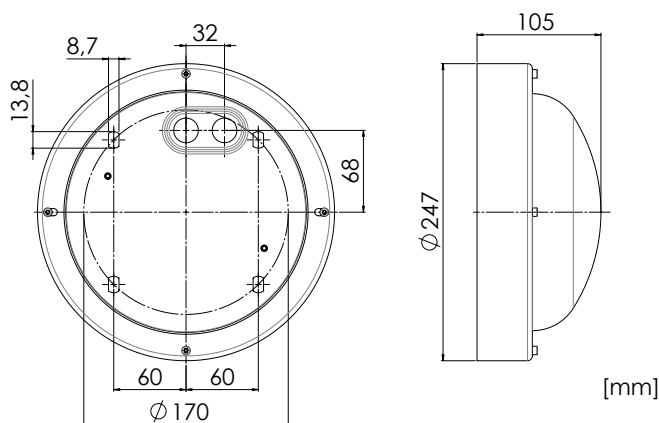


Front view/drilling template

Extras

- 120 V AC execution
- LED execution
- Dimmable electronic ballast
- Electromagnetic ballast
- Different wattages on request
- Other finishes on request

Part no.	5127000200-049
w. halfmoon	5127000200-045
w. grid	5127000200-047

Light source	Compact fluorescent lamp (not included)
Lamp base	G24q-2
Wattage	1x 18 W
Voltage	220-240 V AC
Frequency	50-60 Hz

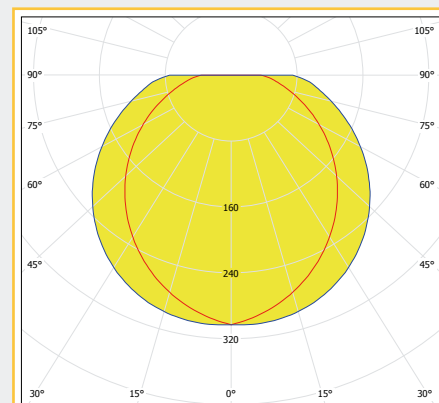

Spare parts	Part no.
Diffuser	7112006200
Halfmoon cover	7112007300
Grid	7112015800
Lamp holder G24q-2	7111016200