


4000-2x13-230-2-CA

Multi-purpose luminaire 4000, LED



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

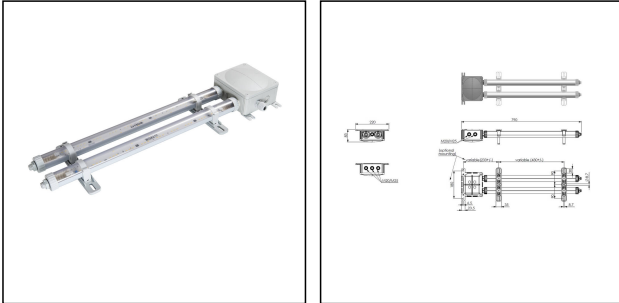

WISKA-Order no.	10104867
Type	4000-2x13-230-2-CA
Material	Polycarbonate
Globe colour	Clear
Wattage	26 W
Power[^]	2 x 13 W
Voltage	230 V
Protection class	IP66/67
Type of Voltage	AC
Frequence	50/60 Hz
Connection	connection box 1210
Operational areas	Outdoor, Engine room, Cargo hold
Temp. range min	-30 °C
Temp. range max	55 °C
Colour rendering index	>80
Ø cable diameter min	7,5 mm
Ø cable diameter max	14 mm
Lamp	LED
Lamp	included
Colour temperature	5600 K
Luminous flux	2000 lm
Average lamp durability	50000 h
Mounting	Ceiling, Wall, Surface mounting
Colour	RAL 7035
External dimensions LxWxH	791x220x83mm

Approval

GL

Weight

1,2 kg

Remarks:

- Breathing via VentPLUG mounted in end cap
- Connection box COMBI MAR 1210
- 2 cable glands ESKV 20 Plus included
- Mounting via 2 mounting rails

Recommended accessories

SP-MPL Vibration damper 2 pads

22000874

Spare parts

SP-4000-Pipe clamps with rail

22000723

SP-4000-LED lamp 13W for COMBI 1210

22000724

20.03.2017

