



High efficient, stainless steel LED floodlights for decks, holds, industrial areas, IP67

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn Powder coated white (RAL9016)
Safety pane	Tempered glass, DIN 12150, partially lacquered
Mounting	Stainless steel bracket, adjustable
Reflector	Aluminium reflectors with spherical facets, interference-colors free
Cable entry	Exterior connection box, cable gland M20
Protection class	IP67

Extras

24 V DC

Safety pane partially satined

Different cable glands on request

Reflectors with different beam angles can be combined

Different color temperatures on request

ST76 L Floodlight

1
6


Part no. 5101005700-xxx

Type	Part. No.
ST76 L 3x 22°	5101005710-001
ST76 L 3x 37°	5101005710-000
ST76 L 3x 52°	5101005710-002
ST76 L 3x 91°	5101005710-019



Type specification

Light source	3x LED array
Wattage	3x 25 W
CCT (color)	5,700 K
CRI	≥ 80
Voltage	110-240 V AC
Frequency	50-60 Hz
Weight	9.5 kg

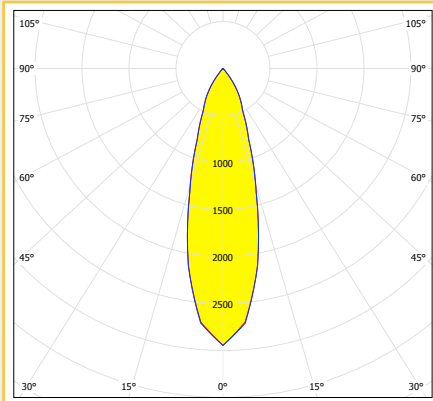

Spare parts

LED array kit	7409003000
Connection type unit	
2x 25 W	7305000700
1x 25 W	7305000800
Cover w. frame	7902002600
Bracket	7501000100
Reflector kit 22°	7901003400
Reflector kit 37°	7901003500
Reflector kit 51°	7901003600
Reflector kit 92°	7901003700

