




Floodlight, max. 1x 200 W for halogen lamps

| | |
|-------------------------|--|
| Design | According to rules of maritime classification societies and relevant standards |
| Housing | Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, powder coated white (RAL9016) |
| Cover | Tempered glass, DIN 12150 |
| Mounting | Stainless steel bracket, adjustable |
| Reflector | Aluminium anodized, wide beam angle |
| Cable entry | Junction box, cable gland M20, nickel plated brass |
| Wiring | Flexible wiring, high temperature resistant |
| Protection class | IP67 |
| Weight | 3.4 kg |

Part no. 110-240 V 5101004400-004
24 V 5101004400-003

| | |
|---------------------|------------------------------|
| Light source | QT-DE lamp (not included) |
| Lamp base | R7s |
| Wattage | 1x 200 W |
| Voltage | 110-240 V AC 24 V DC |
| Frequency | 50-60 Hz 0 Hz |

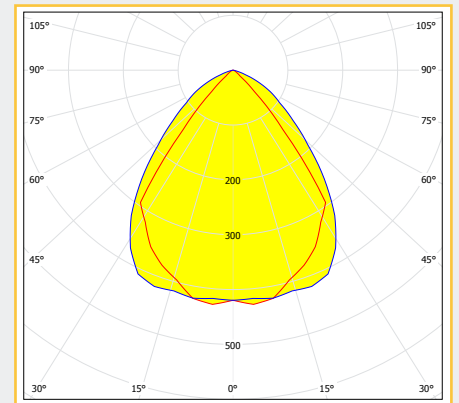


Extras


Execution without junction box

Different cable glands on request

Part no. 5101004400-xxx

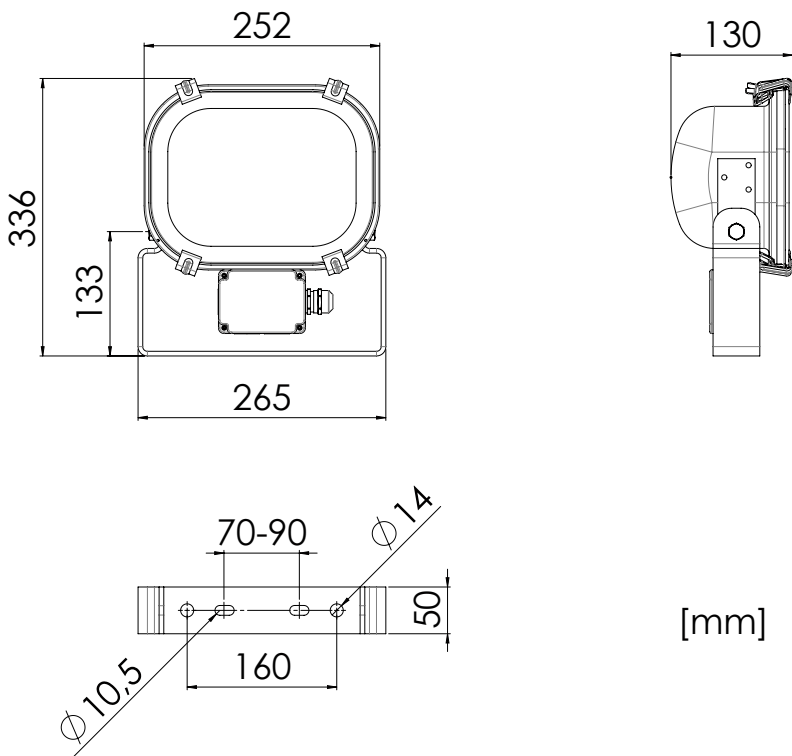

[mm]

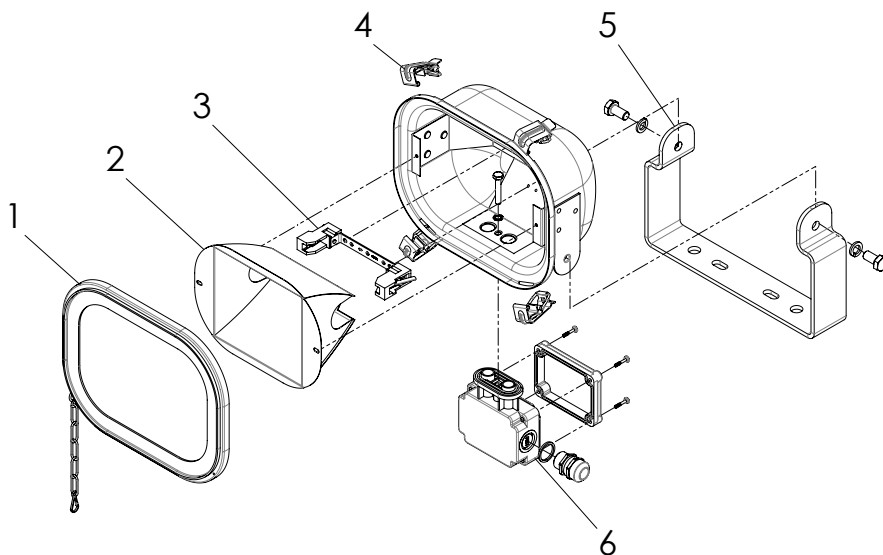

| Spare parts | Part no. |
|-----------------------|------------|
| 1 Cover with frame | 7902001800 |
| 2 Reflector wide beam | 7901000200 |
| 3 Lamp holder RX7s | 7111018800 |
| 4 Clamps (4 pcs) | 7106002400 |
| 5 Bracket | 7501007100 |
| 6 Junction box | 7212005400 |