




## Surface mounted ceiling luminaire for passage ways, cabins, accommodation and public areas


- Design** According to rules of maritime classification societies and relevant standards
- Housing** Galvanized steel, powder coated white (RAL9016)
- Diffuser** Opal polycarbonate, impact-proof
- Mounting** 4 mounting holes, Ø 5.8 mm
- Cable entry** 4 inlets for cables max. Ø 11 mm
- Wiring** Flexible wiring, heat resistant up to 105°C
- Protection class** IP43
- Weight** 2.7 kg (2x 18 W) / 4.4 kg (2x 36 W)

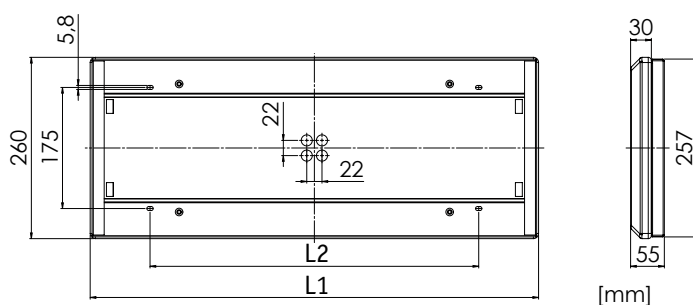

Part no. 2x 18 W 5112000400-xxx  
2x 36 W 5112000300-xxx

- Light source** T8 fluorescent tubes (not included)
- Lamp base** G13
- Wattage** 2x 18 W  
2x 36 W
- Voltage** 220-240 V AC
- Frequency** 50-60 Hz

### 2x 18 W

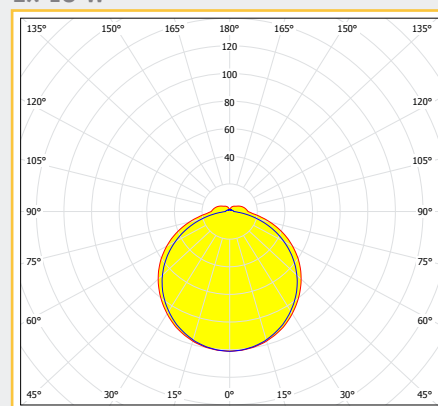

Type	L1	L2
2x 18 W	648	475
2x 36 W	1260	950

### Extras

- 120 V AC execution
- Dimmable electronic ballast
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

Spare parts	Part no.
Diffuser 18 W	7112000600
Diffuser 36 W	7112000700
Lamp holder G13	7111002700