




Part no. 2x 18 W 5112003000-007
2x 36 W 5112003100-009

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz


Superflat surface mounted ceiling luminaire for passage ways, cabins, accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 5.8 mm
Cable entry	4 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP43
Weight	2.6 kg (2x 18 W) / 4.2 kg (2x 36 W)

2x 18 W

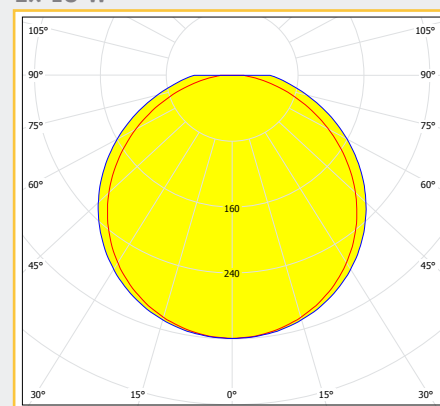


2x 36 W

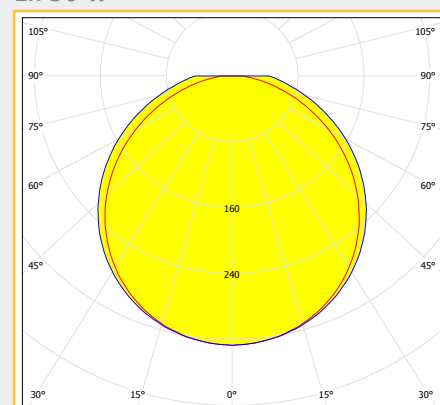


Extras

- 120 V AC execution
- T5 execution (14 W, 24 W, 28 W)
- LED execution
- Dimmable electronic ballast
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

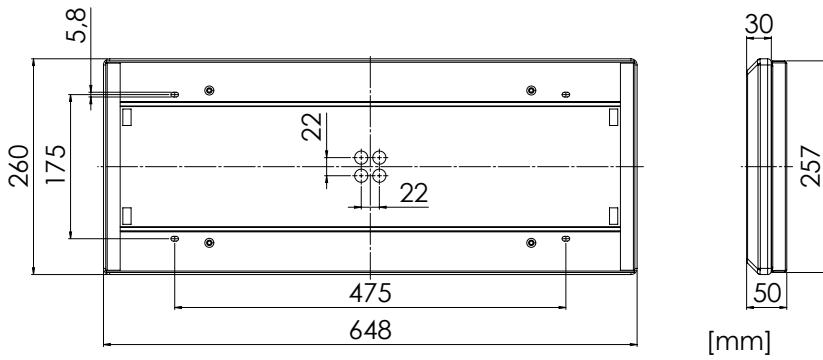

Part no. 5112003000-xxx

Spare parts	Part no.
Diffuser 18 W	7112000600
Lamp holder G13	7111002700

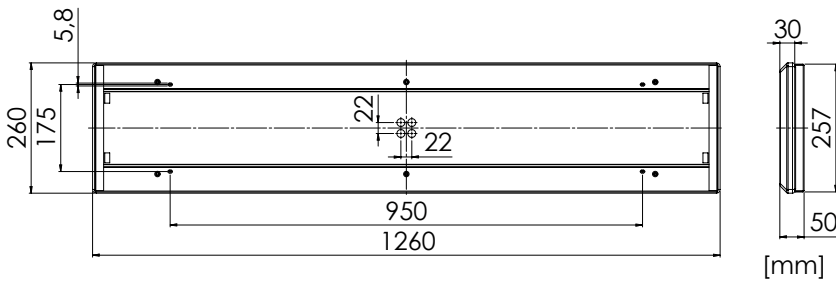

Part no. 5112003100-xxx

Spare parts	Part no.
Diffuser 36W	7112000700
Lamp holder G13	7111002700