



Surface mounted ceiling luminaire for passage ways, cabins, accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	Mounting holes, Ø 5.8 mm
Cable entry	4x inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP43
Weight	3.0 kg (2x 10 W) / 4.5 kg (2x 20 W)

Extras

24 V DC

110-120 V AC

IP44 execution

Dimmable


Different color temperatures on request




Part no. 2x 10 W 5112007100-xxx
2x 20 W 5112007200-xxx

Type specification

Light source	Linear LP LED modules
Wattage	2x 10 W / 2x 20 W
Equivalent	2x 14 / 2x 28 W FL T5 2x 18 / 2x 36 W FL T8
CCT (color)	3,000 K or 4,000 K
CRI	≥ 80
Voltage	220-240 V AC
Frequency	50-60 Hz

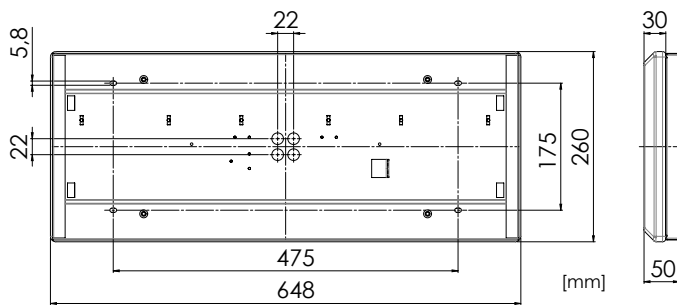

2x 10 W

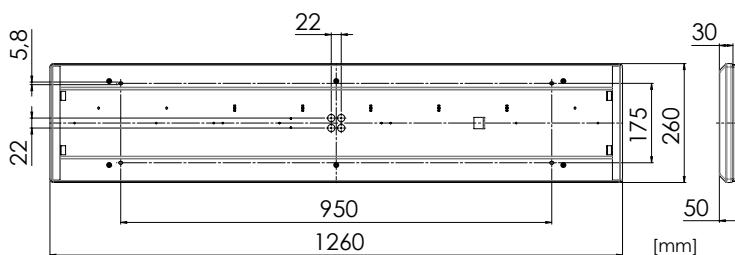

2x 20 W

Spare parts

LED module kit 10 W	7409001400
LED module kit 20 W	7409001500
LED driver	7103011400
Diffuser (2x 10 W)	7112000600
Diffuser (2x 20 W)	7112000700