



Part no. 2x 18 W 5113000400-xxx
2x 36 W 5113000600-xxx

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	1x / 2x 18 W 1x / 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Surface mounted cornice luminaire for floor areas, passage ways, cabins, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
End caps	White polycarbonate
Diffuser	Opal or crystal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 5.5 mm
Cable entry	6 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP30
Weight	3.0 kg (2x 18 W)/ 4.5 kg (2x 36 W)

2x 18 W

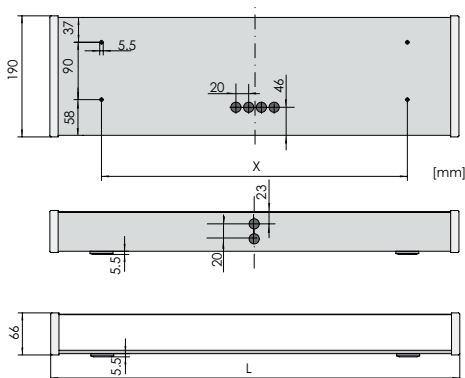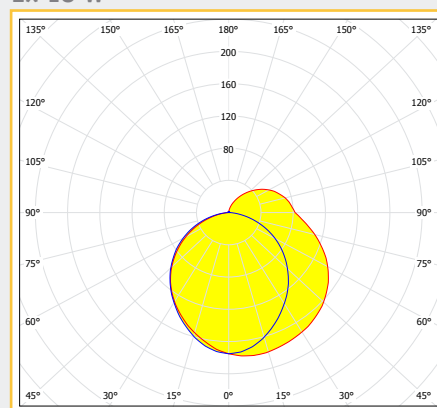

Extras

- 120 V AC execution
- Dimmable electronic ballast
- Electromagnetic ballast
- LED execution
- Emergency lamp holder E14
- 2-pole switch
- Emergency battery backup

Type	L	X
18 W	645	480
36 W	1252	967

Spare parts	Part no.
Opal diffuser 18 W	7112006900
Crystal diffuser 18 W	7112006800
Opal diffuser 36 W	7112001800
Crystal diffuser 36 W	7112001500
End cap	7503000300
Lamp holder G13	7111023600