




Part no. 2x 18 W 5111000100-xxx
2x 36 W 5111000800-xxx

Lamps	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V

Recessed mounted ceiling luminaire for passage ways, cabins, dining rooms, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof, UV resistant
Mounting	4 mounting holes, Ø 5.5 mm
Cable entry	4 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP30. IP44 in conjunction with ceiling


2x 18 W

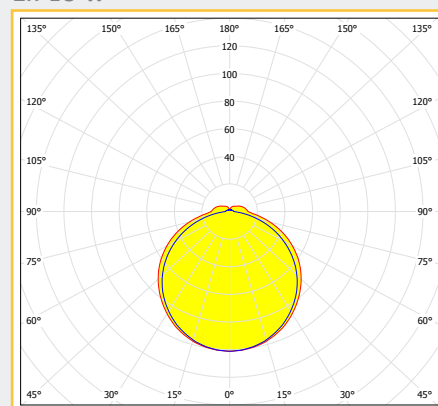

Type	Part no.	Weight
2x 18 W 50 Hz h.p.f.c	5111000100-003	3.6 kg
60 Hz h.p.f.c	5111000100-005	3.6 kg
50-60 Hz	5111000100-046	3.0 kg
2x 36 W 50 Hz h.p.f.c	5111000800-001	4.5 kg
60 Hz h.p.f.c	5111000800-003	4.5 kg
50-60 Hz	5111000800-023	3.8 kg


Extras

- 120 V AC execution
- 24 V DC execution
- LED execution
- Dimmable electronic ballast
- B0- execution
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

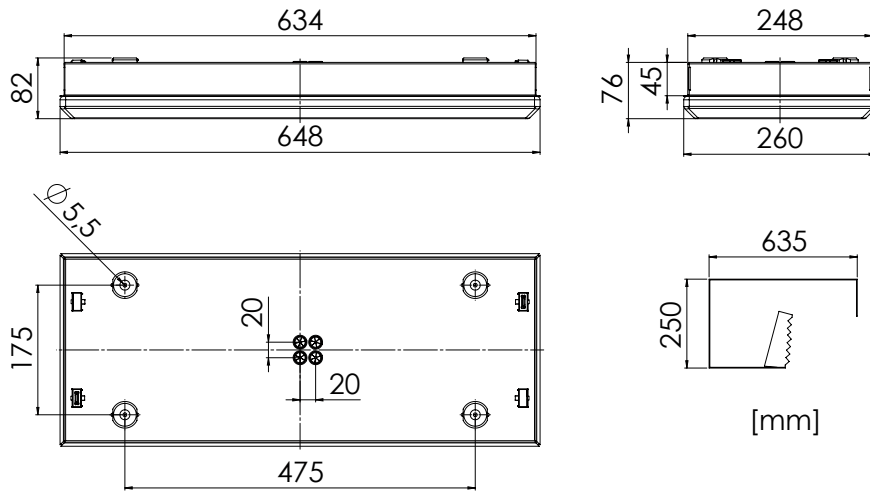

Part no. 5111000100-xxx

Spare parts	Part no.
Diffuser 18 W	7112000600
Lamp holder G13 (4 pcs)	7111000500
w. starter holder (4 pcs.)	7111001000

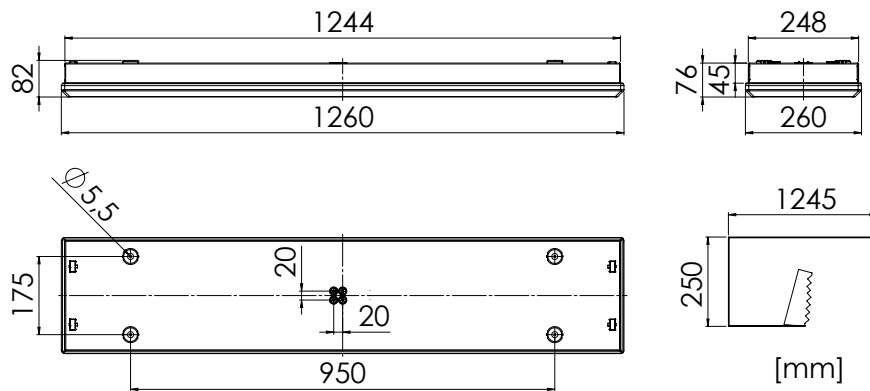

Part no. 5111000800-xxx

Spare parts	Part no.
Diffuser 36 W	7112000700
Lamp holder G13 (4 pcs.)	7111000500
w. starter holder (4 pcs.)	7111001000