




Recessed mounted ceiling luminaire for passage ways, lounges, dining rooms, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Clear polycarbonate with ice crystal structure
Mounting	4 mounting brackets for ceilings max. 35 mm
Cable entry	4 cable entries, Ø 20 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP44 in conjunction with ceiling
Weight	3.5 kg (2x 18 W) / 6.0 kg (2x 36 W)

Part no. 2x 18 W 5111000600-xxx
2x 36 W 5111002500-xxx


Lamps	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V
Frequency	50-60 Hz

2x 18 W

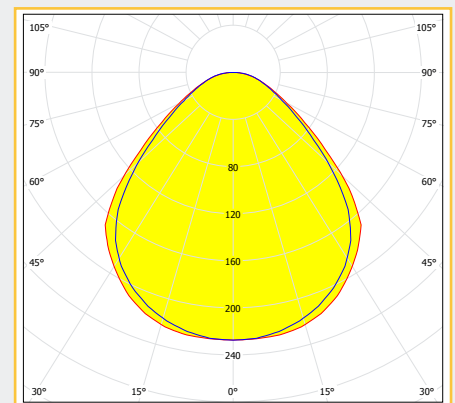


Extras

- T5 execution (14 W, 24 W, 28 W, 50 W)
- 120 V AC execution
- LED execution
- Dimmable electronic ballast
- Electromagnetic ballast
- Different diffusers on request
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

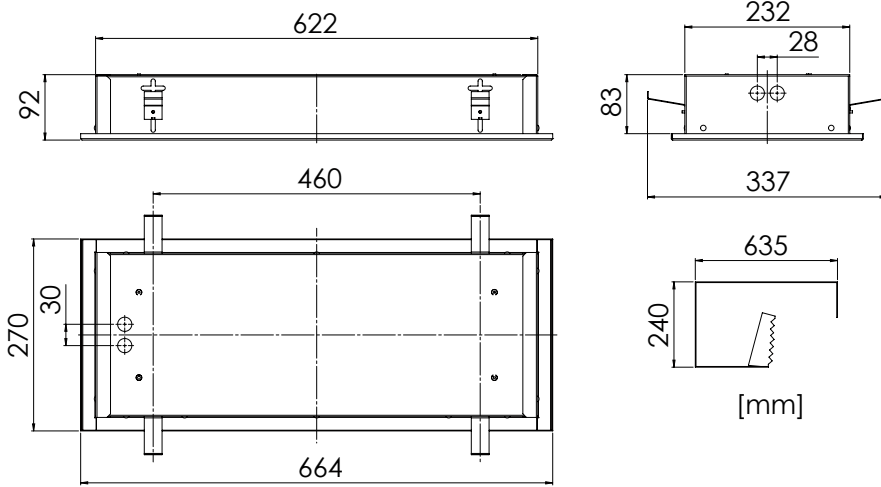

Part no. 5111000600-xxx

Spare parts	Part no.
Diffuser	7112006300
Lamp holder G13	7111021500

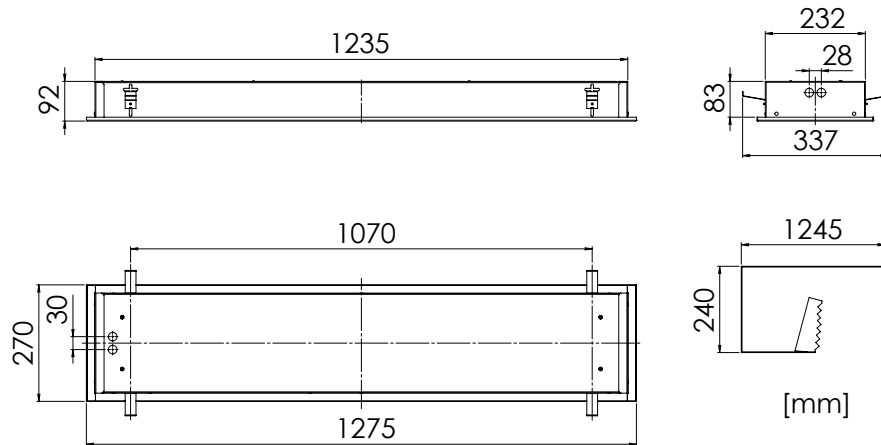

Part no. 5111002500-xxx

Spare parts	Part no.
Diffuser	7112010300
Lamp holder G13	7111021500