




with louver



with icocrystal diffuser

## Recessed mounted ceiling luminaire for passage ways, lounges, dining rooms, accommodation areas

<b>Design</b>	According to rules of maritime classification societies and relevant standards
<b>Housing</b>	Galvanized steel, powder coated white (RAL9016)
<b>Diffuser</b>	Clear polycarbonate with ice crystal structure
<b>Mounting</b>	Mounting set for ceilings 23-55 mm
<b>Cable entry</b>	2 cable entries, Ø 20 mm
<b>Wiring</b>	Flexible wiring, heat resistant up to 105°C
<b>Protection class</b>	With diffuser pane: IP44 in conjunction with ceiling With louver: IP20
<b>Weight</b>	3.5 kg (2x 18 W) / 6.0 kg (2x 36 W)


### Extras


- T5 execution (14 W, 24 W, 28 W, 50 W)
- 120 V AC execution
- LED execution
- Dimmable electronic ballast
- Electromagnetic ballast
- Different louvers and diffusers on request
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

Part no. 2x 18 W 5111005400-050  
2x 36 W 5111005900-013

<b>Lamps</b>	T8 fluorescent tubes (not included)
<b>Lamp base</b>	G13
<b>Wattage</b>	2x 18 W 2x 36 W
<b>Voltage</b>	220-240 V AC
<b>Frequency</b>	50-60 Hz


### 2x 18 W

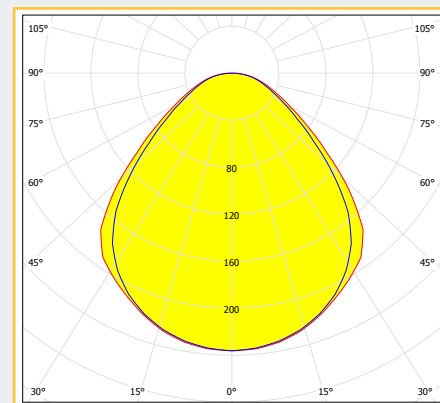

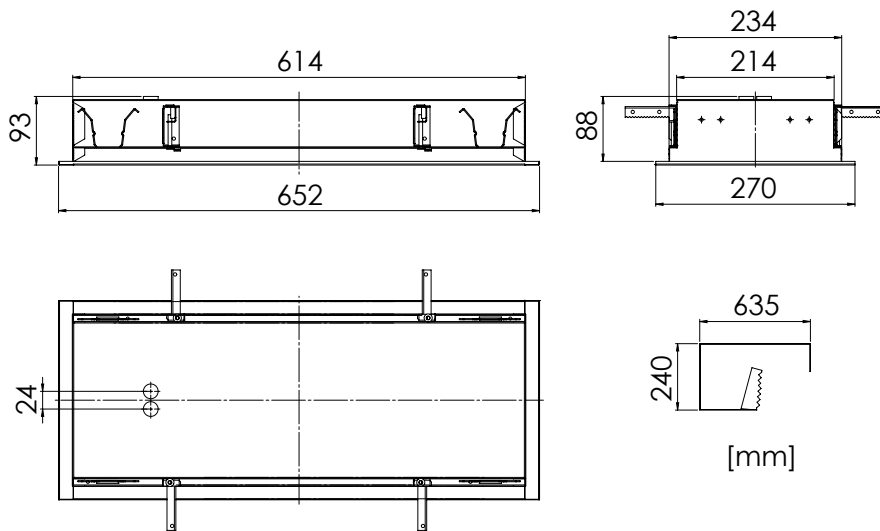

Part no. 5111005400-xxx

Spare parts	Part no.
Frame w.diffuser 18 W	7931000900
Lamp holder G13 (4 pcs)	7111018300
w. spring (4 pcs)	7111019000

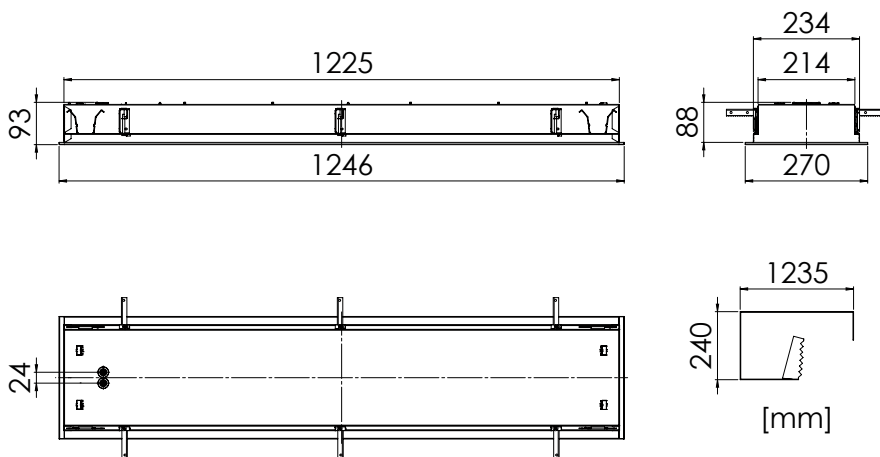

Part no. 5111005900-xxx

Spare parts	Part no.
Frame w.diffuser 36 W	7931002000
Lamp holder G13 (4 pcs)	7111018300
w. spring (4 pcs)	7111019000