



## Recessed mounted ceiling luminaire for accommodation and public areas


<b>Design</b>	According to rules of maritime classification societies and relevant standards
<b>Housing</b>	Galvanized steel, powder coated white (RAL9016)
<b>Diffuser</b>	Clear polycarbonate with ice crystal structure or louver
<b>Mounting</b>	Mounting set for ceilings 23-55 mm
<b>Cable entry</b>	2 cable entries, Ø 20 mm
<b>Wiring</b>	Flexible wiring, heat resistant up to 105°C
<b>Protection class</b>	IP44 in conjunction with ceiling, IP20 with louver

## Extras


- 2x 20 W Linear LP LED modules
- 24 V DC
- Dimmable
- Emergency battery back-up
- Alternative housing colors on request
- Wide range of different louvers and diffusers available
- Different mounting sets on request



DE29

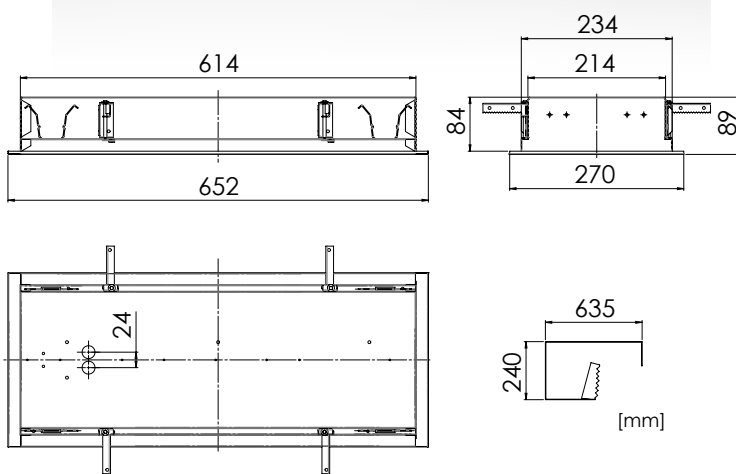


DE29 S

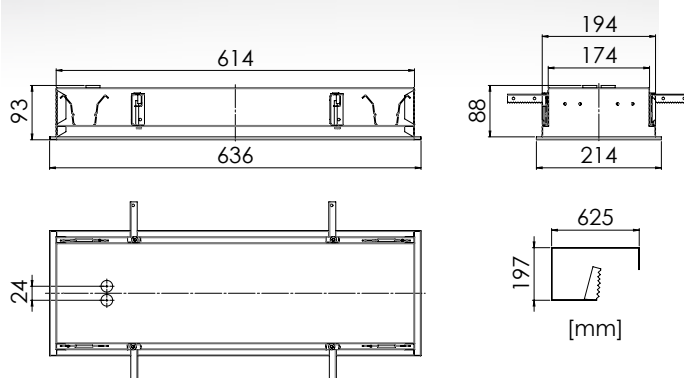

Part no. 2x 10 W 5111009100-xxx

Light source	Linear LP LED modules
Wattage	2x 10 W
Equivalent	2x 14 W FL T5 2x 18 W FL T8
CCT (color)	3,000 K or 4,000 K
CRI	≥ 80
Voltage	110-240 V AC
Frequency	50-60 Hz
Weight	4.0 kg

Part no. 2x 10 W 5111009200-xxx

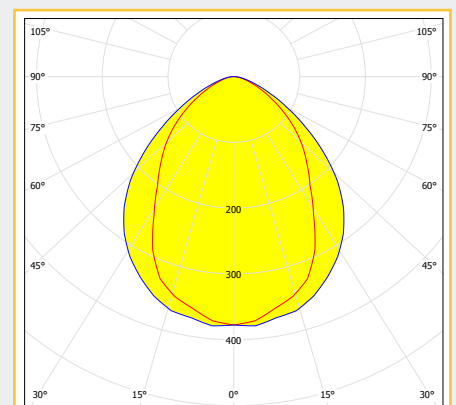

Spare parts

LED module kit	7409001400
LED driver	7103011100
Ice crystal cover DE29	7931000900
Ice crystal cover DE29 S	7931001000