




Part no. 5111006100-001

<b>Light source</b>	Compact fluorescent lamp (not included)
<b>Lamp base</b>	2G11
<b>Wattage</b>	1x 18 W
<b>Voltage</b>	220-240 V AC
<b>Frequency</b>	50-60 Hz

## Recessed mounted ceiling luminaire for passages, cabins, lounges, dining rooms, accommodation areas

<b>Design</b>	According to rules of maritime classification societies and relevant standards
<b>Housing</b>	Galvanized steel, powder coated white (RAL9016)
<b>Diffuser</b>	Opal PMMA
<b>Mounting</b>	Mounting set for ceilings 23-55 mm
<b>Cable entry</b>	2x inlets for cables max. Ø 11 mm
<b>Wiring</b>	Flexible wiring, heat resistant up to 105°C
<b>Protection class</b>	IP44 in conjunction with ceiling
<b>Weight</b>	2.1 kg

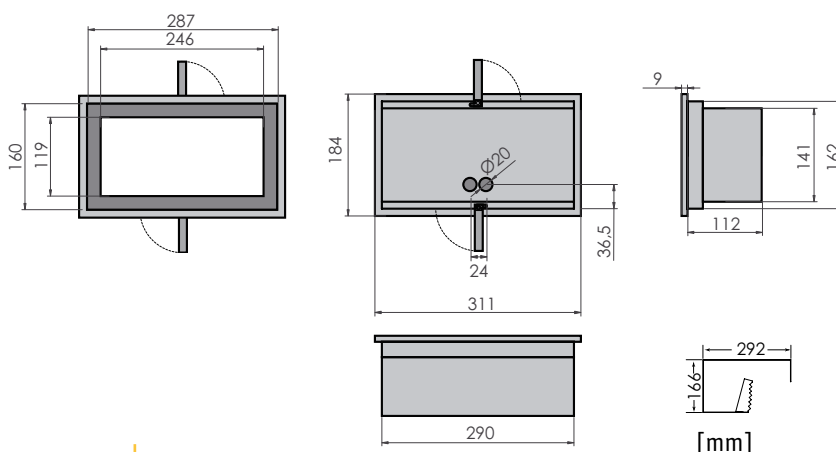

### Extras

- Electromagnetic ballast
- Different louvers and diffusers on request
- Different cable entries on request
- Emergency battery back-up