




18 W




36 W

Explosion proof luminaire, surface mounting



Design	According to rules of maritime classification societies and relevant standards
Ex marking	II 2G Ex d e mb IIC T5 Gb II 2D Ex t IIIC T60°C IP66/67 Db (or T65°C for 2x 36 W)
Housing	Galvanized steel, seamless deep drawn, powder coated white (RAL9016)
Cover	Clear polycarbonate, impact-proof
Mounting	Mounting brackets
Cable entry	1 Ex cable gland M20
Ta	-20°C - +40°C
Protection class	IP67
Weight	4.6 kg (2x 18 W)/6.3 kg (2x 36 W)

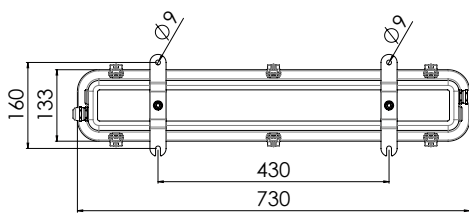

18 W



36 W

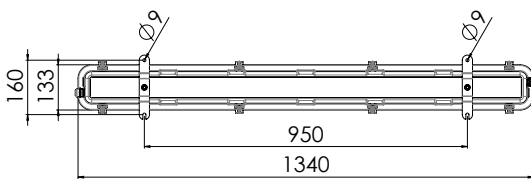

Extras

Stainless steel housing


Two cable glands on request

Technical modification reserved without prior notice


Part no. 2x 18 W 5108001000-002
2x 36 W 5108001200-004

Light source	T8 fluorescent tubes (not included)
Lamp Base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

2x 18 W

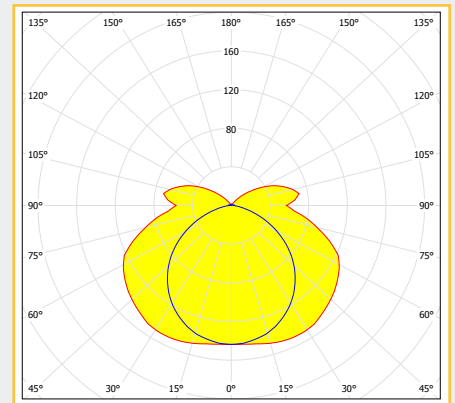

2x 36 W

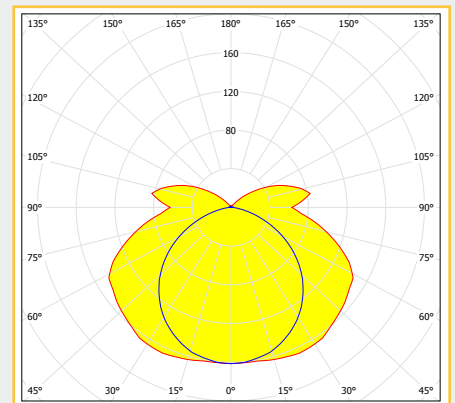

Spare parts	Part no.
Cover (2x 18 W)	7112001100
Cover (2x 36 W)	7112001200
Lamp holder G13	7111014000