




Explosion proof luminaire, surface mounting

Design	According to rules of maritime classification societies and relevant standards
Ex marking	II 2 G Eex d IIB T6
Housing	Aluminium, seawater resistant
Cover	Clear polycarbonate, impact-proof
Mounting	Hinged base
Cable entry	1 Ex cable gland M20, 1 Ex blind plug M20
Protection class	IP67
Weight	6.4 kg (2x 18 W)/9.3 kg (2x 36 W)

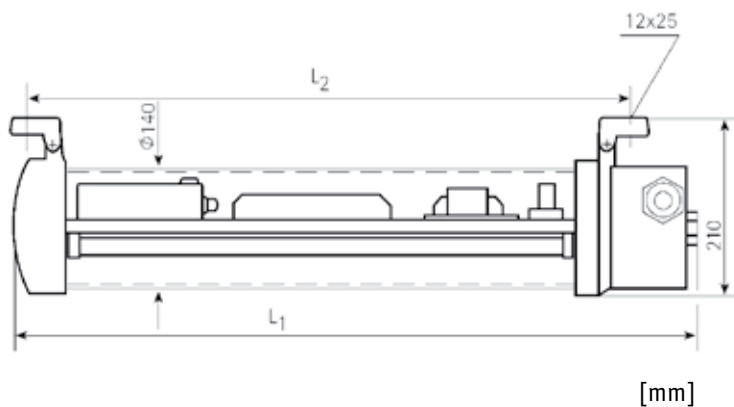

Part no. 2x 18 W 5108002200-003
2x 36 W 5108002400-003

Light source	T8 fluorescent tubes (not included)
Lamp Base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Type	L1	L2
2x 18 W	803	717
2x 36 W	1413	1327

Extras

- 120 V AC execution
- Electromagnetic ballast
- Different cable glands available
- Emergency battery back-up