



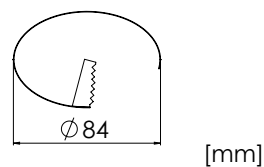


Flat downlight for bathrooms and accomodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated
Decorative ring	Galvanized steel, gold/chrome finish or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 10 mm
Power supply	Ensto 2-pole plug
Protection class	IP44

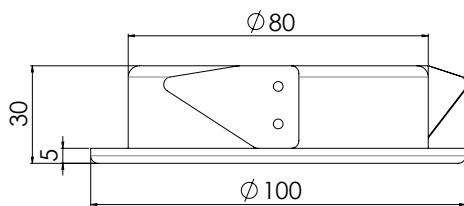

Part no. 5404000400-xxx

Light source	LED
CCT (color)	2,700 K
Wattage	4 W
CRI	≥ 85
Constant current	350 mA

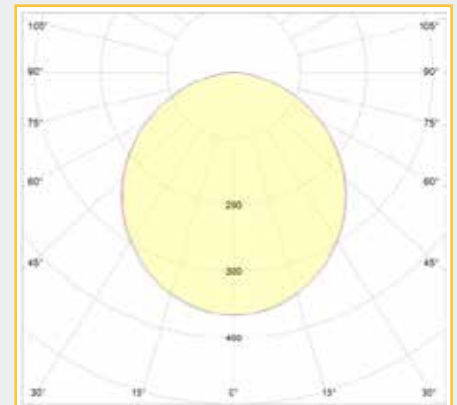

Extras

- Different connectors on request
- Other color temperatures on request
- 24V execution
- LED driver accordance to customers request