



Flat surface Downlight for wall and ceiling mounting, with changeable cover ring of various colors

| | |
|-------------------------|---|
| Design | According to rules of maritime classification societies and relevant standards |
| Decorative ring | Gold/chrome finish or colors in accordance with RAL or NCS |
| Diffuser pane | PC opal |
| Mounting | 3 holes, Ø 4.5 mm |
| Connection type | Contact plug /ceiling connector with WAGO 3-pole plug (cable length on customer requirements) |
| Protection class | IP20 |
| Weight | 0.45 kg |




Extras

- Other color temperatures on request
- Different connectors on request
- Connector units for B0/ B15 application and sandwich panels available
- Emergency light operation



Part no. 5503000700-001
(Trim ring and connector not included)

| | |
|--------------|-----------------------|
| Light source | Cluster LP LED module |
| Wattage | 10 W |
| Equivalent | 13 W CFL |
| CCT (color) | 2,700 K |
| CRI | ≥ 80 |
| Voltage | 220-240 V AC |
| Frequency | 50-60 Hz |

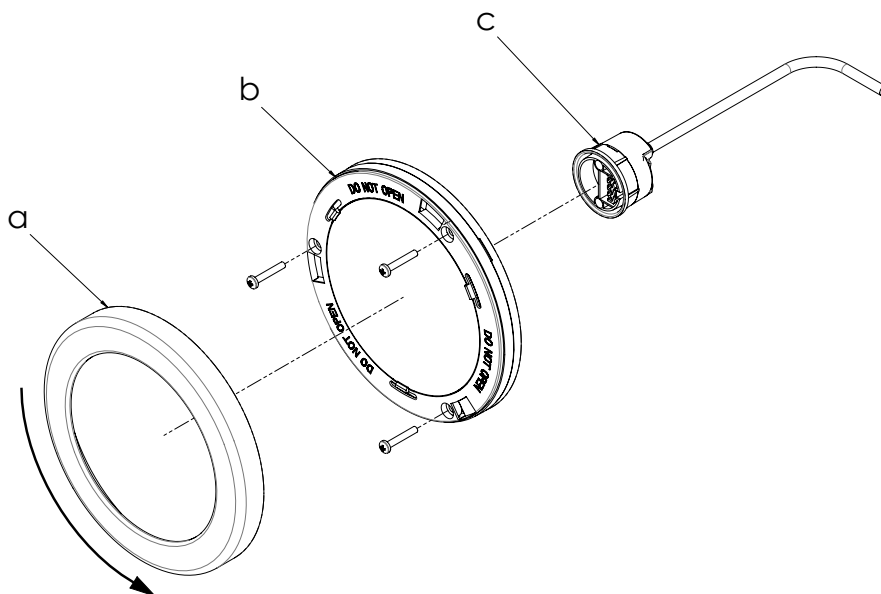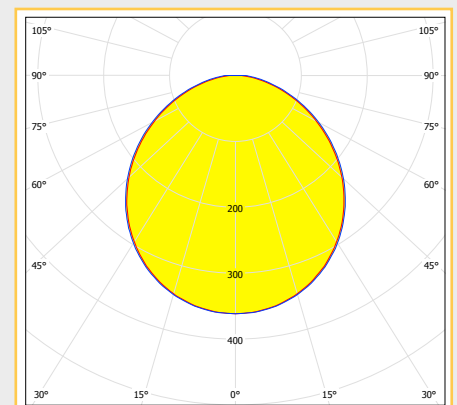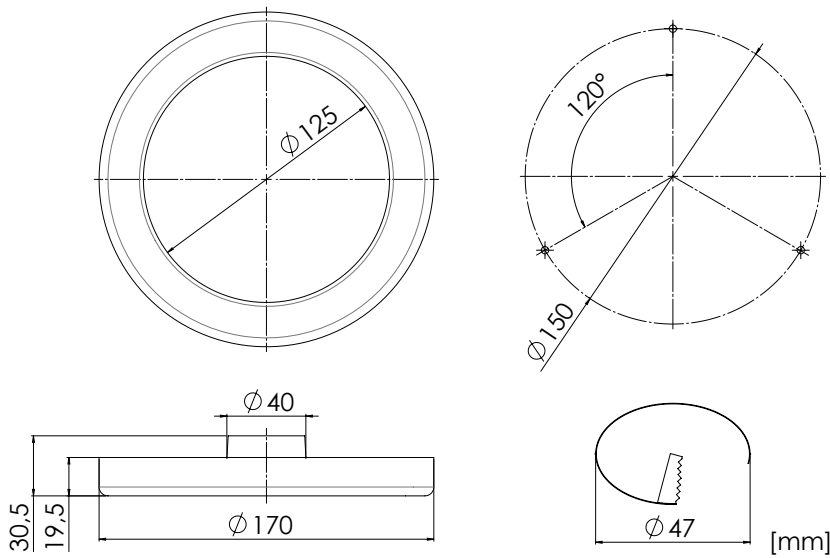

| Parts | Part no. |
|-------------|----------------|
| a Trim ring | 5532001910-xxx |
| b Downlight | 5503000700-xxx |
| c Connector | 5533001100-xxx |