

## LED WALL LIGHT

## IP56 Type MMBGLM10

**Application:** Engine rooms, Low visibility areas, Decks, Bilges  
**Ideal replacement :** Incandescent bulb 100W

### Housing:

PBT Fiberglass reinforced body

### Heat sink:

Marine grade aluminium with powder coating

### Diffuser and Guard :


Opal polycarbonate

**Weight:** 1.0 Kg



### Featuring

- \* Complete integrated solution (housing - LED module - diffuser)
- \* Long service life of 50,000 hours @ 45°C (Ta)
- \* Compact and lightweight design
- \* Vibration resistant
- \* Safety, EMC and IEC compliance
- \*EXTRA\* Triac dimming compatible (220-240VAC & 100V-120VAC only)

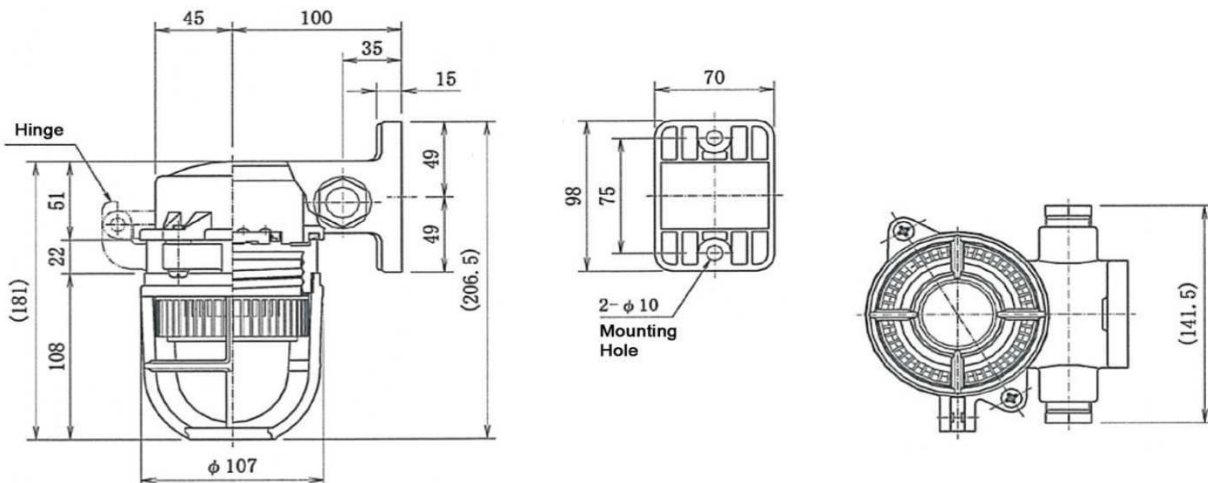

### Technical specifications

order n°	V / Hz	Power	CCT	Beam angle	T.a.	Lumen
<b>MMBGLM11</b>	100-230V AC/DC	11W	5000°K	160°	-30 / +45°C	950 lm
<b>MMBGLM10-24</b>	24V DC	10W	5000°K	160°	-30 / +45°C	950 lm

Special executions on demand: contact our Customer Service