

MARINE LED FLOODLIGHT IP66 Type MMFL3

Application: Decks, Marinas, Docks, Ports, Warehouses
Ideal replacement : Halogen 1500W- Metal Halide 250W

Housing:

Marine grade aluminium alloy with powder coating

Front cover:

Tempered glass, thickness 4mm

Bracket:




Stainless steel , adjustable

Weight: 5,7Kg



Featuring

- * Rapid heat-dispersing design to prolong lamp life and optimise lumen output
- * Long service life of 100,000 hours @ 50°C (Ta)
- * Compact and lightweight design
- * Interchangeable module
- * Safety, EMC and IEC compliance
- * Option Triac Dimming Compatible

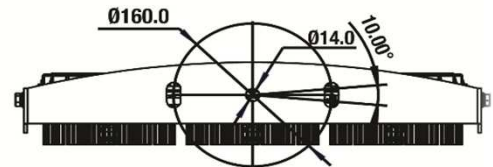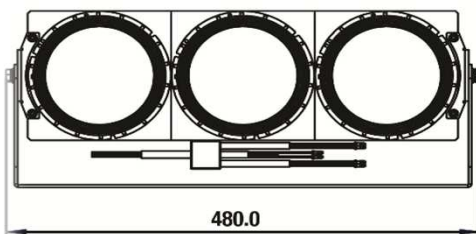

Technical specifications

order n°	V / Hz	Power	CCT	Beam angle	T.a.	Lumen
MMFL3-W-5	230V/50-60	166W	5000°K	115°	-40 / +50°C	16500 lm
MMFL3-N-5	230V/50-60	166W	5000°K	45°	-40 / +50°C	16200 lm
MMFL3-W-110	110V/50-60	166W	5000°K	105°	-40 / +50°C	13500 lm
MMFL3-N-110	110V/50-60	166W	5000°K	45°	-40 / +50°C	13500 lm
MMFL3-W-24	24V DC	166W	5000°K	130°	-40 / +50°C	14700 lm
MMFL3-N-24	24V DC	166W	5000°K	35°	-40 / +50°C	13800 lm

special executions on demand : contact our Customer Service