

WISKA MARITIME LIGHTING

The LED 4010 is available with single, double or triple LED stripes as well as short or long length, giving you plenty of luminous flux options!



In addition, a **3 hour back up battery** is available in both short and long models adding an extra level of security and peace of mind to users.

Short model measures (with back up battery):
595 x 185 x 78 mm


Long model measures (with back up battery):
875 x 185 x 78 mm


Features



Protection class	IP66 / IP67
Temperature range	-25 °C - 50 °C
Colour	Black
Globe colour	Opal
Material	Housing Polycarbonate, Light cover Polycarbonate

LED Multi-purpose Luminaire 4010 HIGH PERFORMANCE

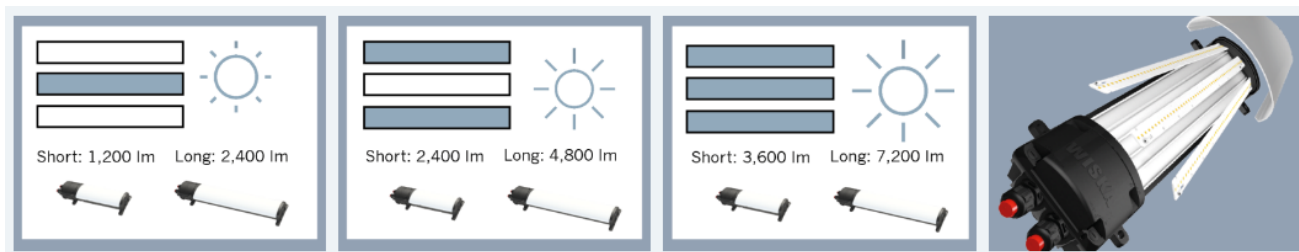

WISKA-No.	Type	Power ^A	Voltage	Frequency	Luminous flux	
10111887	4010-1x8-230-2-CC	1 x 8 W	230 V	50/60 Hz	1200 lm	M 25 x 1,5
10111888	4010-2x8-230-2-CC	2 x 8 W	230 V	50/60 Hz	2400 lm	M 25 x 1,5
10111889	4010-3x8-230-2-CC	3 x 8 W	230 V	50/60 Hz	3600 lm	M 25 x 1,5
10111890	4010-1x16-230-2-CC	1 x 16 W	230 V	50/60 Hz	2400 lm	M 25 x 1,5
10111891	4010-2x16-230-2-CC	2 x 16 W	230 V	50/60 Hz	4800 lm	M 25 x 1,5
10111892	4010-3x16-230-2-CC	3 x 16 W	230 V	50/60 Hz	7200 lm	M 25 x 1,5
10111893	4010-1x8-24-2-CC	1 x 8 W	24 V	50/60 Hz	1200 lm	M 25 x 1,5
10111894	4010-2x8-24-2-CC	2 x 8 W	24 V	50/60 Hz	2400 lm	M 25 x 1,5
10111895	4010-2x8-230-2-CC-E02	2 x 8 W	230 V	50/60 Hz	2400 lm	M 25 x 1,5
10111896	4010-2x16-230-2-CC-E02	2 x 16 W	230 V	50/60 Hz	4800 lm	M 25 x 1,5

- For spare parts, refer to the contacts below

- Per i ricambi fare riferimento ai contatti sottostanti.

LED Multi-purpose Luminaire 4010



Type	4010-1X8-230-2-CC	4010-1X8-24-2-CC	4010-2X8-230-2-CC	4010-2X8-24-2-CC	4010-3X8-230-2-CC	4010-1X16-230-2-CC	4010-2X16-230-2-CC	4010-3X16-230-2-CC	4010-2X8-230-2-CC-E02	4010-2X18-230-2-CC-E02
WISKA Order no.	10111887	10111893	10111888	10111894	10111889	10111890	10111891	10111892	10111895	10111896
Short / Long Version	Short	Short	Short	Short	Short	Long	Long	Long	Short	Long
Dimensions (mm)	495x185x78	495x185x78	495x185x78	495x185x78	495x185x78	775x185x78	775x185x78	775x185x78	595x185x78	875x185x78
IP Rating	IP66/67	IP66/67	IP66/67	IP66/67	IP66/67	IP66/67	IP66/67	IP66/67	IP66/67	IP66/67
Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Impact Rating	IK10	IK10	IK10	IK10	IK10	IK10	IK10	IK10	IK10	IK10
Voltage	230 V	24 V	230 V	24 V	230 V	230 V	230 V	230 V	230 V	230 V
Number of LED Stripes	1	1	2	2	3	1	2	3	2	2
Wattage	8 W	8 W	16 W	16 W	24 W	16 W	32 W	49 W	16 W	32 W
Luminous Flux	1,200 lm	1,200 lm	2,400 lm	2,400 lm	3,600 lm	2,400 lm	4,800 lm	7,200 lm	2,400 lm	4,800 lm
Colour Temp	4,000 K	4,000 K	4,000 K	4,000 K	4,000 K	4,000 K	4,000 K	4,000 K	4,000 K	4,000 K
Beam Type	Wide	Wide	Wide	Wide	Wide	Wide	Wide	Wide	Wide	Wide
Temperature Range	-25 °C · 50 °C	-25 °C · 50 °C	-25 °C · 50 °C	-25 °C · 50 °C	-25 °C · 50 °C	-25 °C · 50 °C	-25 °C · 50 °C	-25 °C · 50 °C	-25 °C · 50 °C	-25 °C · 50 °C
Mounting	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling
Rated Lifetime	L70/B10@Ta +45 °C	L70/B10@Ta +45 °C	L70/B10@Ta +45 °C	L70/B10@Ta +45 °C	L70/B10@Ta +45 °C	L70/B10@Ta +45 °C	L70/B10@Ta +45 °C	L70/B10@Ta +45 °C	L70/B10@Ta +45 °C	L70/B10@Ta +45 °C
System Lifetime	50,000 hours	100,000 hours	100,000 hours	100,000 hours	100,000 hours	100,000 hours	100,000 hours	100,000 hours	100,000 hours	100,000 hours
Back up Battery	No	No	No	No	No	No	No	No	Yes	Yes
Description	Short version, 1 x LED strip 1,200 lm 230 V	Short version 1 x LED strip 1,200 lm 24 V	Short version 2 x LED strips 2,400 lm 230 V	Short version 2 x LED strips 2,400 lm 24 V	Short version 3 x LED strips 3,600 lm 230 V	Long version 1 x LED strip 2,400 lm 230 V	Long version 2 x LED strips 4,800 lm 230 V	Long version 1 x LED strip 7,200 lm 230 V	Short version 2 x LED strips 2,400 lm 230 V Back up Battery	Long version 2 x LED strips 4,800 lm 230 V Back up Battery