



PRESSURE WATERTIGHT LUMINAIRE FOR OPEN DECKS AND DECK RAILS, ABLE TO RESIST HEAVY SEAS

Design	According to rules of maritime classification societies and relevant standards
Housing/cover	Clear polycarbonate, impact-proof, UV-resistant
Mounting	2 stainless steel fixing clamps (not included)
Cable entry	2 cable glands M20, PA 6
Protection class	IP68
Weight	1.4 kg
Light source	Linear LP LED module
Wattage	Max. 9 W / HO: max. 18 W
CCT (color)	4,000 K
Luminous flux	1,200 lm / HO: 2,200 lm
CRI	≥ 80
Voltage	220–240 V AC
Frequency	50–60 Hz

PART NO.

TL53S	5105011700-002
TL53S HO	5105011700-001


SPARE PARTS

PART NO.

Clear tube TL53S	7112036500
Fixing clamp	7501000401

EXTRAS

- > 24 V DC execution
- > 120 V AC execution
- > Different lengths

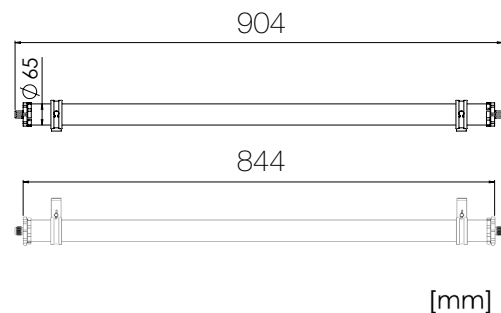

fixing clamp

