


## PART NO.

|              |                |
|--------------|----------------|
| DA25 Eco     | 5112014400-001 |
| DA25 HO      | 5112014500-001 |
| DA25 HO DALI | 5112014500-002 |





## ★ EXTRAS

- > 4,000 K
- > 120 V AC execution
- > Black housing
- > Dimmable 1–10 V

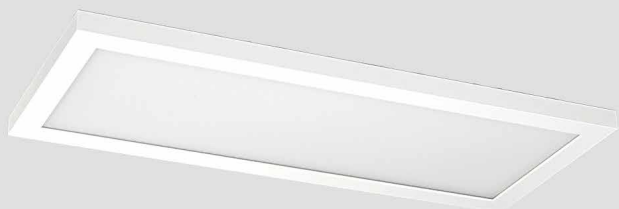

CEILING LED LUMINAIRE, SURFACE MOUNTING  
FOR PASSAGE WAYS, CABINS, LOUNGES,  
ACCOMMODATION AREAS AND OFFICES

|                         |   |
|-------------------------|---|
| <b>Design</b>           | According to rules of maritime classification societies, additional VDE and IEC |
| <b>Housing</b>          | Aluminium powder coated white (RAL9016)   |
| <b>Diffuser</b>         | Polycarbonate prismatic   |
| <b>Mounting</b>         | Mounting holes 6 × Ø 6 mm   |
| <b>Connection type</b>  | Connection cable with Wago 3-pole plug  |
| <b>Protection class</b> | IP44  |
| <b>Weight</b>           | 2.7 kg  |
| <b>Wattage</b>          | Eco: max. 12 W / HO: 24 W   |
| <b>CCT (color)</b>      | 3,000 K   |
| <b>Luminous flux</b>    | Eco: 1,200 lm / HO: 2,400 lm  |
| <b>UGR</b>              | ≤ 19  |
| <b>CRI</b>              | ≥ 80  |
| <b>Voltage</b>          | 220–240 V AC  |
| <b>Frequency</b>        | 50–60 Hz  |
| <b>Power supply</b>     | Remote LED driver   |



[mm]