



RECESSED MOUNTED CEILING LUMINAIRE FOR PASSAGE WAYS, ACCOMMODATION AREAS AND CORRIDORS

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 5.2 mm
Cable entry	4 inlets for cables max. Ø 13 mm
Protection class	IP30 / IP44 in conjunction with ceiling
Weight	3.1 kg
Light source	Linear LP LED modules
Wattage	Max. 20 W
CCT (color)	3,000 K or 4,000 K
Luminous flux	1,500 lm
CRI	≥ 80
Voltage	220–240 V AC
Frequency	50–60 Hz

PART NO.

DE16S 5111008610-xxx


SPARE PARTS

PART NO.

DE16S cover 7112000600

EXTRAS

- > 120 V AC execution
- > 24 V DC execution
- > Dimmable
- > Emergency battery back-up
- > Different fitting systems

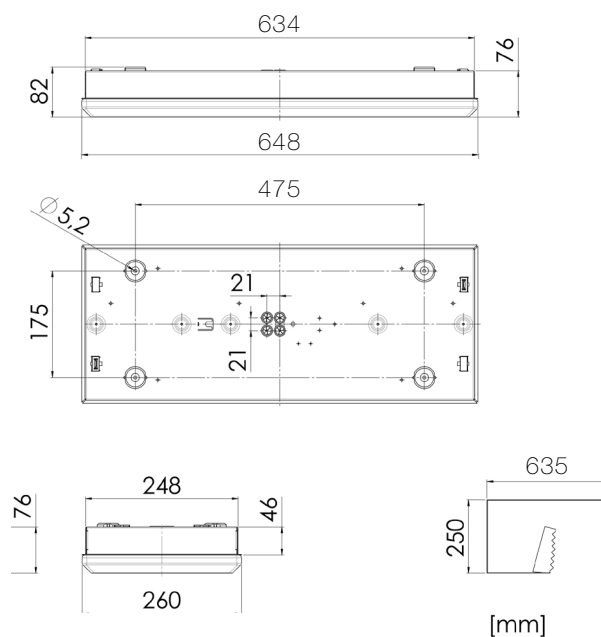

DEALER : MAC MARINE s.r.l.
 Ponte Colombo
 16126 Genova Porto - Italy
 Tel. +39 010 2465300 Fax +39 010 8690338
 P.IVA / VAT Nr. IT 02324760996
 Email: info@marinecomponents.it