




WATERTIGHT LED DOWNLIGHT FOR BATHROOMS, ACCOMMODATION AND PUBLIC AREAS

<b>Design</b>	According to rules of maritime classification societies and relevant standards
<b>Housing</b>	Aluminium
<b>Decorative ring</b>	White (RAL9016)
<b>Cover</b>	Polycarbonate clear or opal
<b>Mounting</b>	2 fixing springs for ceilings max. 35 mm
<b>Connection type</b>	Connection cable with Wago 3-pole plug
<b>Protection class</b>	IP20 / IP55 in conjunction with ceiling
<b>Weight</b>	0.3 kg
<b>Light source</b>	LED array
<b>Wattage</b>	Eco: max. 6 W / HO: max. 12 W
<b>CCT (color)</b>	2,700 K
<b>CRI</b>	≥ 90
<b>Voltage</b>	230 V AC
<b>Frequency</b>	50–60 Hz

<b>PART NO.</b>	<b>BEAM</b>	<b>TYPE</b>	<b>LUMEN</b>
5306007400-001	20°	Eco	750 lm
5306007400-002	40°	Eco	750 lm
5306007400-003	60°	Eco	750 lm
5306007400-004	Opal	Eco	550 lm
5306007500-001	20°	HO	1200 lm
5306007500-002	40°	HO	1200 lm
5306007500-003	60°	HO	1200 lm
5306007500-004	Opal	HO	850 lm

#### ★ EXTRAS

- > Black baffle
- > Ring in chrome
- > Dimmable DALI or 1–10V
- > 120 V AC execution
- > Different color temperatures
- > Different connectors

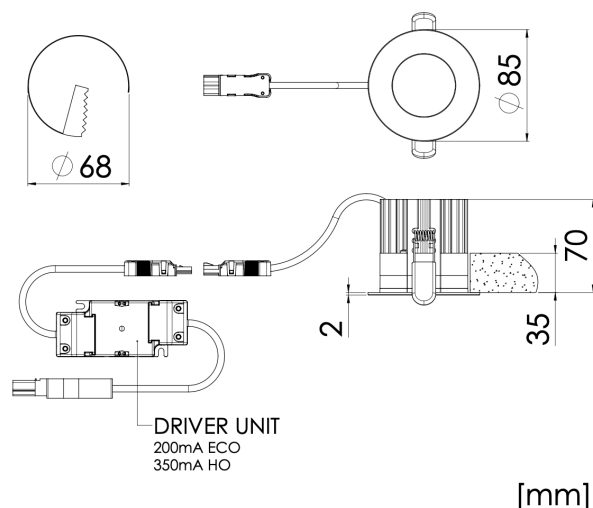

[mm]