

MARINE LED FLOODLIGHT IP66/ IP67 Type MMFL290

Application: Decks, Marinas, Docks, Ports, Warehouses
Ideal replacement : Halogen 2000W / HPS 400W

Housing:

Marine grade aluminium alloy with powder coating

Front cover:

Tempered glass, thickness 4mm

Bracket:




Stainless steel , adjustable

Weight: 8,6Kg



Features

- * Rapid heat-dissensing design to prolong lamp life and optimise lumen output
- * Long service life of 50.000 L70@ 50°C (Ta)
- * Compact and lightweight design
- * Safety, EMC and IEC compliance

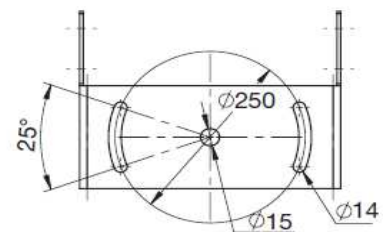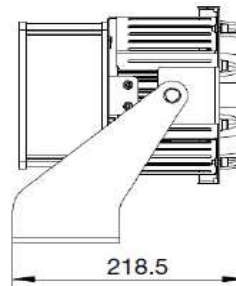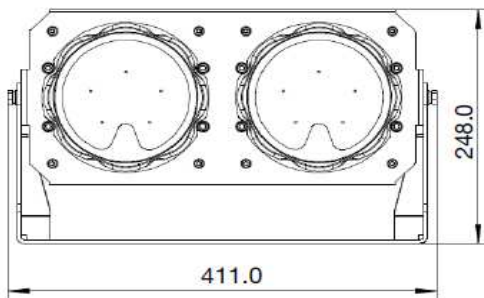

(mm)

Technical specifications

order n°	V / Hz	Power	CCT	Beam angle	T.a.	Lumen
MMFL290-N-5	110-230V/50-60	180W	5000°K	17°	-40 / +50°C	22800lm
MMFL290-M-5	110-230V/50-60	180W	5000°K	45°	-40 / +50°C	21600 lm
MMFL290-W-5	110-230V/50-60	180W	5000°K	105°	-40 / +50°C	23400 lm

special executions on demand : contact our Customer Service