





Explosion proof luminaire, surface mounting


Design	According to rules of maritime classification societies and relevant standards
Ex marking	II 2G Ex de IIC T4 Gb II 2D Ex tb IIIC T80°C Db IP66
Housing	Reinforced polyester
Cover	Clear polycarbonate, impact-proof
Mounting	2 screw threads M8
Cable entry	1 Ex cable gland M25, 1 Ex blind plug M25
Ta	-20°C - +50°C
Protection class	IP66
Weight	5.1 kg (2x 18 W)/7.3 kg (2x 36 W)

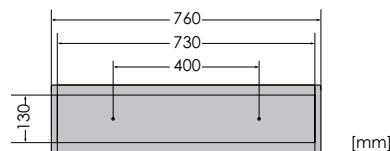

18 W




36 W

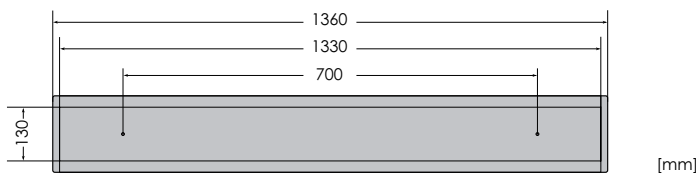

Part no. 2x 18 W 5108000100
2x 36 W 5108000200

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	110-240 V AC
Frequency	50-60/0 Hz

2x 18 W

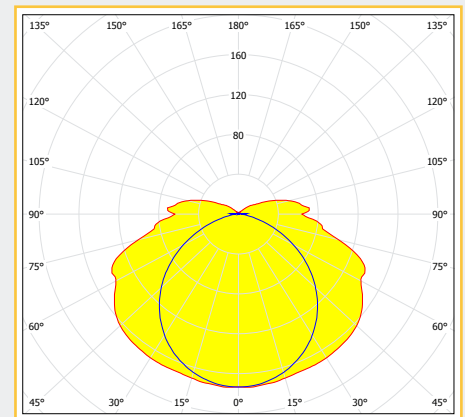

Extras

Different fixing systems available

Emergency battery back-up

Spare parts	Part no.
Cover (2x 18 W)	7112005500
Cover (2x 36 W)	7112005600