




Part no. 5106000xxx-xxx

Light source	T8/T5 fluorescent tubes (not included)
Wattage	2x 14 W 2x 18 W 2x 28 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz


Surface mounted luminaire for kitchens, pantries, provision stores

Design	According to rules of maritime classification societies and regulation of USPH
Base plate	Stainless steel
Cover	Clear polycarbonate, impact-proof, with silicone rubber gasket
Mounting	6/8 mounting holes, Ø 5.2 mm
Cable entry	2 cable glands M20. Position see page 38 (Type A / Type B)
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP56
Dimensions	See page 38/39

2x 18 W

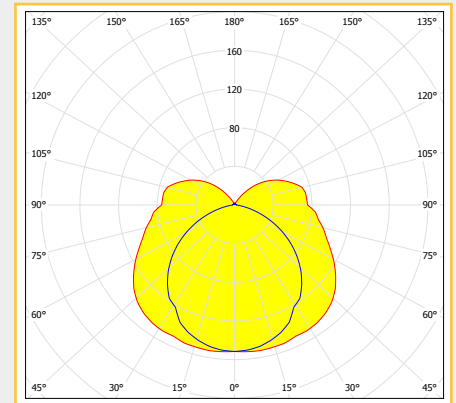

2x 36 W

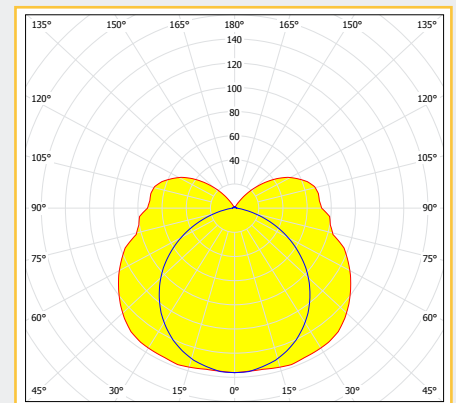



Type	Lamp base	Part no.	Weight
2x 14 W	G5	5106000700-024	2.7 kg
2x 18 W	G13	5106000700-017	3.0 kg
2x 28 W	G5	5106000800-011	5.0 kg
2x 36 W	G13	5106000800-005	5.1 kg

Extras

- 120 V AC execution
- LED execution
- Electromagnetic ballast
- Different cable entries on request
- Emergency battery back-up





Part no. 5106000700-xxx
5107000600-xxx

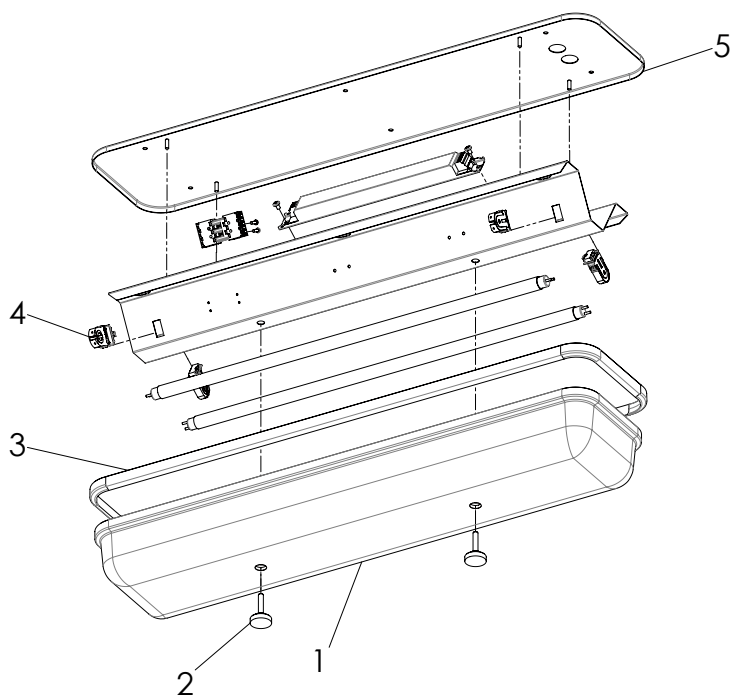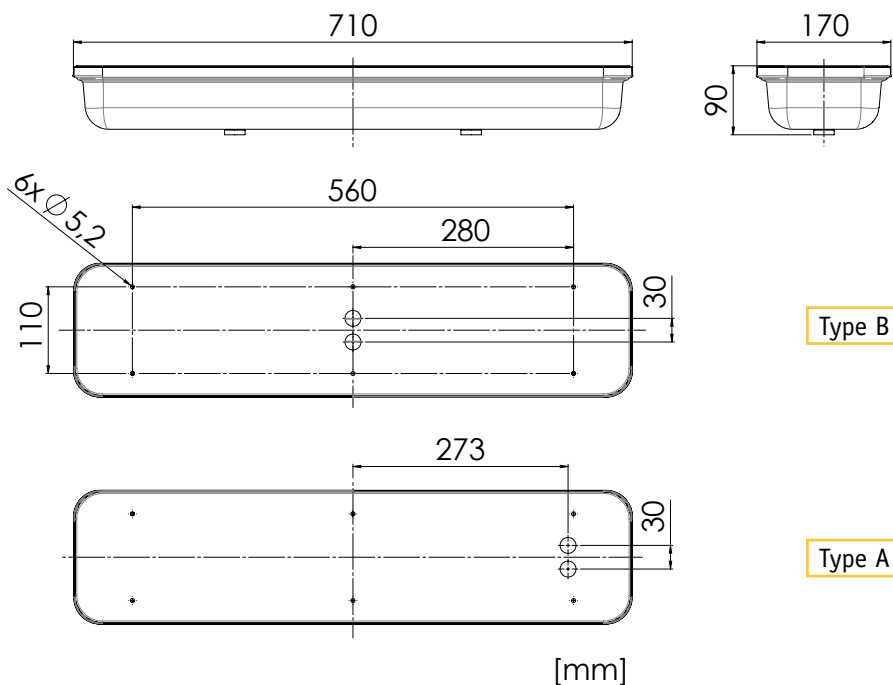

Spare parts	Part no.
1 Cover	7112003200
2 Cover screws (6 pcs)	7508000100
3 Silicone gasket	7301000200
4 Lamp holder G5 (4pcs)	7111023100
Lamp holder G13 (4pcs)	7111023800
5 Base plate (type A)	7210001700
Base plate (type B)	7210001600

Part no. 5106000800-xxx

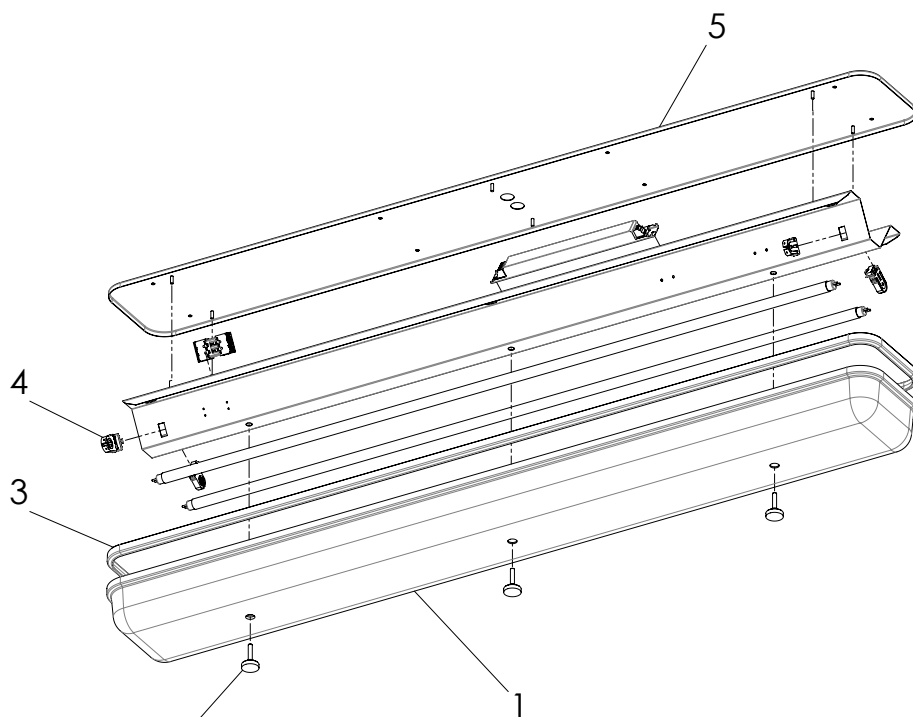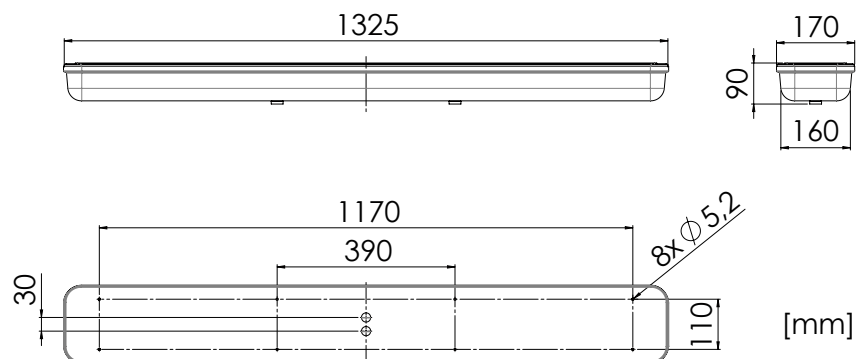

Spare parts	Part no.
1 Cover	7112020000
2 Cover screws (6 pcs)	7508000100
3 Silicone gasket	7301000300
4 Lamp holder G5 (4pcs)	7111023100
Lamp holder G13 (4pcs)	7111023800
5 Base plate	7210001900